



LØFTLIGHT

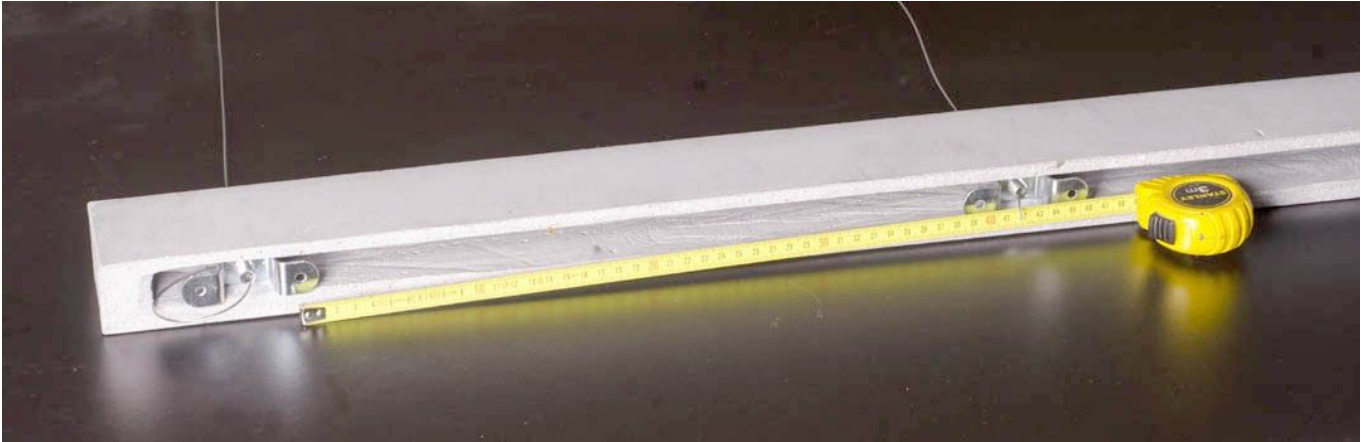


1. Measure precisely the distance between mounting holes (6 for 197cm, 4 for 162cm and 106cm) and mark them on the ceiling. Before measuring make sure mounting elements are positioned in one plane with the ceiling rose edges. If the ceiling surface requires it - install wall plugs.

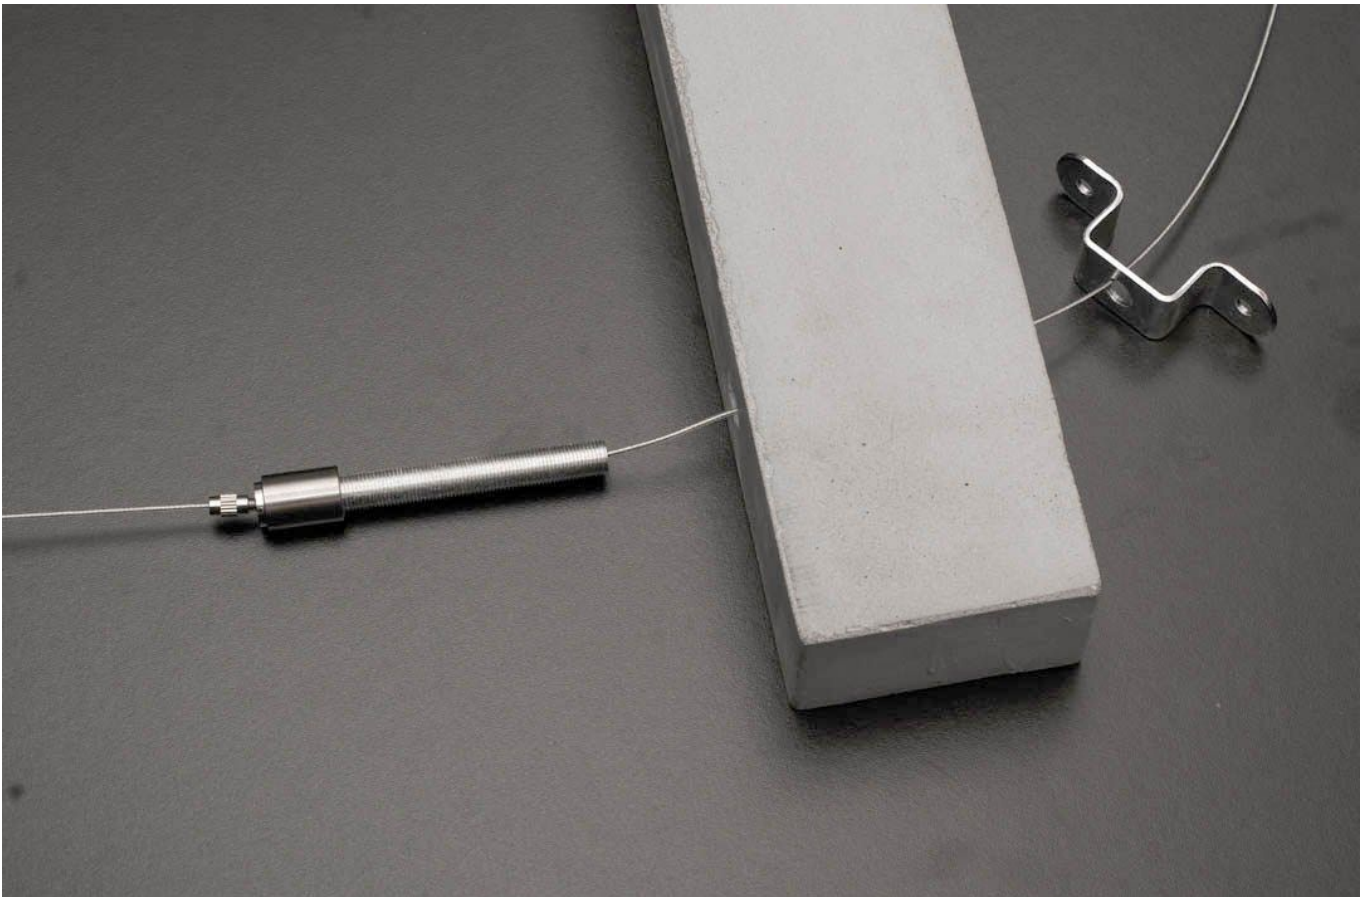

2. Twist off the mounting element to loosen it from ceiling rose. Make the same for all the mounting elements.



3. Mount the elements to ceiling then twist in the long, threaded sleeves. Be sure to lift the lamp during the process.

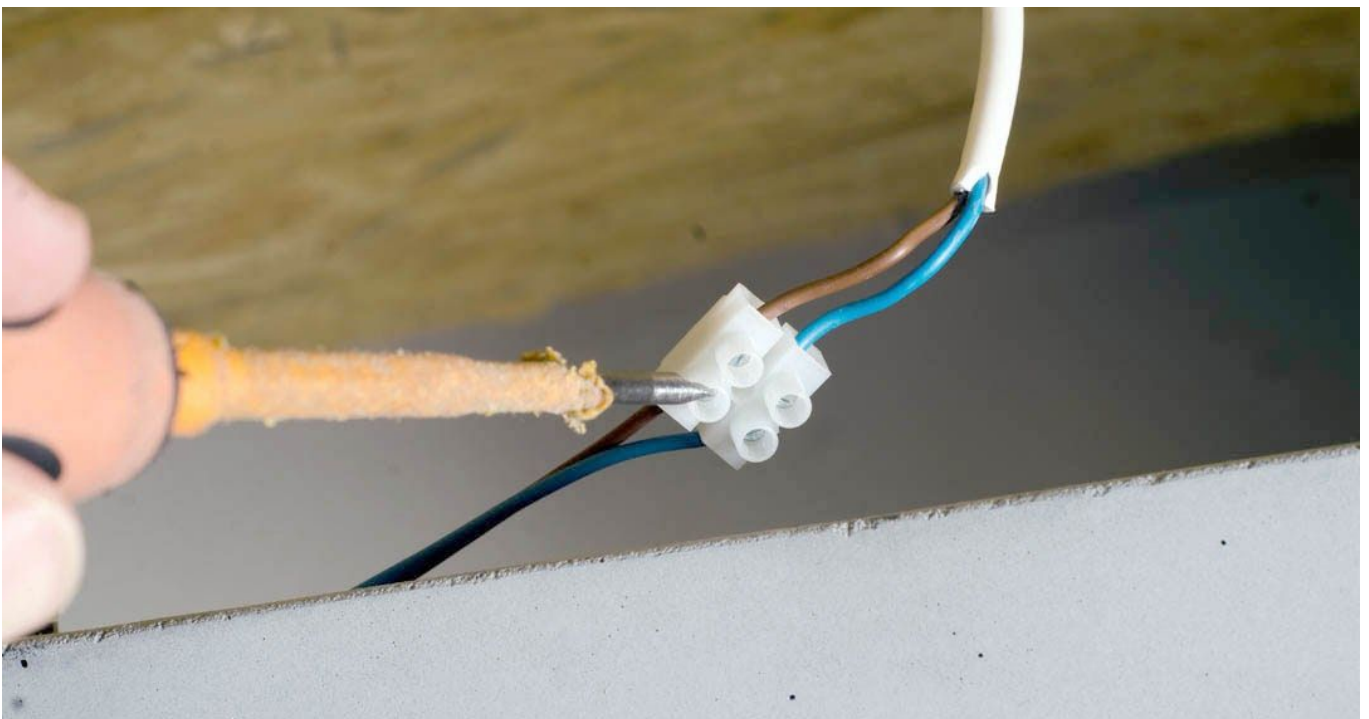

4. Connect the driver with 230V source.



5. Lift the ceiling rose and hide the driver inside with the wires.



6. Elevate the ceiling rose part and move it as close to the ceiling as possible.



7. Screw the metal parts with the stoppers to secure the part position.



8. Level the lamp with the stoppers. Push it towards the ceiling to make the line loose. Secure the position by screwing the stopper safety cap.